POND PERMIT APPLICATION

Received on			Permit Fee
Permit application and pond plan to b	e filled out and fee paid at th	ne Medina County Eng	gineer's Office.
Forms for ponds with 10 acres or les excavated ponds with less than 1.5 surface area and less than 10 feet of Water Conservation District at 6090	s acres of surface are a, or o of effective dam height, ma	e <mark>mbankment ponds</mark> ay then be taken to the	with less than 1.5 acre
Ponds with more than 10 acres of d ereviewed and inspected by the <i>Medir</i>	rainage area or that use a na County Engineer's offic	pipe as the principal e.	spillway, will be issued
All ponds <i>intended for use as a drin</i>	<i>king water source</i> <u>must</u> be	e approved by the Cou	ınty Health Department.
Owner/Contractors must check with the requires a permit for any pond being the second being	ouilt. Each Township has th	ning Clerk to determin eir own requirements.	e whether the Township
Owner of property		Phone	
Owner's mailing address		City	State Zip
Pond to be installed at		Tow	nship
PP#Pond Size)	Other info	·
Contractor Name or Contact Person	n information: Phone	Cel	I
Address	City	State	Zip Code
Contractor/Owner <u>MUST</u> call app completed. Call either: Medina Engineer 330-723-9568 or MC H	County Soil & Water Co.		
(For Office Use Only) Application No.	Dated	By	
Site Plan Received Yes No Appr	oved □Yes □No Flood Pla	ain □ Yes □ No Pern	nit Issued
WatershedDam	Ot1		
Approved for Issue	by	Date	

POND PERMITTING PROCESS IN MEDINA COUNTY

Important Points to Remember:

- * This permit is intended to cover ponds designed with 10 acres or less of drainage area, and using a grass spillway as the principal spillway along with the trickle tube to manage water level.
- * Any plan which includes a drainage area larger than 10 acres or uses a pipe as the principal spillway requires a private engineer to certify the design.
- * This review is intended to ensure that pond design meets the Standards and Specifications of the Natural Resources Conservation Service, U.S. Department of Agriculture.
- * One copy of the Standards and Specifications for Pond Design will be provided to each contractor upon request by the Medina County SWCD.
- * Township zoning regulations for setback from road, property lines, and main buildings must also be met.
- Contractor/landowner is responsible for notifying all utilities prior to excavation. Utilities worksheet is included.
- * The County Health Department must approve all ponds intended for use as a drinking water source.
- * When locating a pond site, landowner and contractor must be aware of the location of any current or replacement water supply or on-site septic system. It is recommended that the County Health Dept. be contacted regarding setbacks from these facilities.

Optional Steps:

Depending on landowner requests and Medina County Soil and Water Conservation District (SWCD) workload and staffing.

- a) SWCD representative can meet with landowner at proposed pond site for a preliminary site investigation.
- b) SWCD representative can be present when test pits are dug to check the soil suitability for pond construction.

Required Steps:

- 1. Contractor/landowner completes the Pond Construction Plan standard form and delivers it to the SWCD office.
- 2. SWCD representative reviews the Pond Construction Plan to ensure that all required information is provided and legible.
- SWCD representative will make a visual site investigation to determine if the pond site appears as drawn on the plan and that no apparent drainage problems will be created by the construction of the proposed pond.
- 4. The contractor/landowner obtains a Stormwater Management and Erosion Control Permit from the County Engineer's office.
- 5. The contractor/landowner obtains the proper permits from the Township Zoning Inspector, if required.
- 6. The contractor/landowner contacts County Engineer's office to obtain an inspection for the completed pond.

Medina County Soil & Water Conservation District 803 E. Washington St., Suite 160 Medina, OH 44256 (330) 722-2605 Medina County Engineers Permit Section 791 W. Smith Rd. Medina, OH 44256 (330) 723-9564

POND CONSTRUCTION PLAN

POND CONSTRUCTION PLAN

LANDOWNER NAME	_	ADDRESS OF	POND SITE
STREET ADDRESS	-	TOWNSHIP OF	POND SITE
CITY, ZIP CODE	-	GENERAL LOCATIO	N OF PROPERTY
Designed by		Contr	actor
	Name		
	Street Address		
· · · · · · · · · · · · · · · · · · ·	City, State, Zip		
	Phone		
APPLICATION ISSUED - COUNTY ENC	SINEER	Initials	Date
PERMIT NO.			
COMMENTS			
PLAN RECEIVED			
PLAN RECEIVED - MEDINA CO. SWCI)	Initials	Date
PLAN REVIEWED - MEDINA CO. SWC	D		
SITE INSPECTION - MEDINA CO. SWC	ED.		
COMMENTS -			
PLAN RECEIVED - TWP ZONING INSP	ECTOR	Initials	Date
PERMIT NO.			
Is landowner willing to install a dry hydrant fo	or fire protection if pond s		-
COMMENTS		<u> </u>	

2 working days before you dig - CALL TOLL FREE 800-362-2764

O.U.P.S. REFERENCE NO.	
------------------------	--

NOTE TO EXCAVATOR

Excavator must notify all utilities at least 48 hours and not more than 10 days prior to the planned commencement of excavation.

- 1. Member utilities will be contacted by calling OUPS (1-800-362-2764) and the Ohio Oil and Gas Association (1-800-925-0988)
- 2. Each Limited Basis Participant will be contacted by the excavator using the telephone number provided.

	UNDERGROUN	ND UTILITIES AT EXC	AVATION SITE	
UTILITY		Member	Limited	
Name	Address	Phone No.	OUPS	Basis Participant

CRITICAL AREA SEEDING RECOMMENDATIONS

- 1. Critical areas include grass spillways, diversions, pond fills and cut slopes, and other exposed areas.
- 2. It is desirable to clear site of topsoil, and stockpile for later use.

3. Preparation of Seedbed

- a) Where possible, cover area to be seeded with 4" to 6" of topsoil.
- b) Area to be seeded should be smooth and free from roots, rocks, and other materials that will interfere with seedbed preparation.
- c) Apply lime and fertilizer uniformly over entire area to be seeded. Lime: Apply 150 pounds per 1000 sq. ft. or 3 tons per acre. Fertilizer: Apply 20 pounds per 1000 sq. ft. or 860 pounds per acre of 12-12-12 analysis.
- d) Prepare firm seedbed, mix lime and fertilizer with surface soil.

4. Seeding

- a) Apply seed uniformly over the freshly prepared seedbed and press seed into soil with a cultipacker or similar tool.
- b) Seed area with Kentucky 31 Tail Fescue at 40 pounds per acre or 1 pound per 1000 sq. ft., or call Medina County SWCD for alternative seed mixtures.

5. Mulching

- a) Mulch uniformly all seeded areas immediately after seeding with straw or hay at the rate of 2 tons per acre, or 2 to 3 bales per 1000 sq. ft.
- b) Hold mulch in place by (1) running a "weighted" disk with notched blades set straight to anchor the straw; (2) on slopes too steep to disk, hold mulch in place with mulch netting, jute netting, or fiberglass matting; (3) or by treating mulch with suitable asphaltic material.

6. Maintenance

- a) Fertilize as needed to maintain desired vegetative stand.
- b) Protect the vegetation from damage by livestock.
- c) Repair damage to vegetation by filling with dirt and sodding or reseeding damaged areas.
- d) Clip as often as needed to control weeds and to keep grass at a desired stand and height.
- e) Keep grass at least 3 inches tall on diversions, and pond fills, and 6 inches tall on pond spillways.

PLAN VIEW

DIRECTIONS:

- 1. Locate property showing one road intersection and house number.
- Complete a drawing (to scale) of the property surrounding the pond showing 2 foot contour lines, including existing elevations in the area to confirm the direction of fall.
 - Indicate area(s) for spoil dispersal. ب 4.
- Locate all incoming and outlet drainage swales and streams on the property before and after construction.
- and trickle tube, all existing and proposed buildings, driveways, septic tank (including replacement field), property lines, and landmarks for Include North arrow, approximate pond distance from road and property line, location and dimensions of proposed pond including spillway
- Calculate the number of acres contributing runoff water into the pond (watershed). 6

CROSS SECTION


.....

- ٠Ä DIRECTIONS
- Fill in all required elevations (corresponding to elevations on PLAN VIEW page) using the appropriate design standard.
 Trickle tube minimum size is 4 inches and should not intercept the saturation zone. Any different type of spillway must be designed by a professional engineer. Inside and outside slopes must total a minimum of 5% (3% & 5% or 2,5% & 2.5%) ໝໍ
 - ന്

EMBANKMENT POND DESIGN STANDARD is 3 feet or greater (measured from top ide toe of alope. may with 10 ft. B. Using spillway with 20 ft. bottom width. th. 102.5 Top of Fill 102.0 100.5 Grassed Spillway 100.5 100.0 Trickle Tube 100.0	FILL SPILWAY ELEVATION PIPE DUTLET FLOWLINE ELEV. SECTION TOTAL CHANNEL ELEVATION REVISUS MATERIALS
EMBANKMENT POND DESIGN STANDA Height of fill is 3 feet or greater (measured from top of fill to outside toe of stope. A. Using spillway with 10 ft. B. Using spillway with battom width. Example Elevations: Example Elevations: Top of Fill 102.5 Top of Fill Grassed Spillway 1100.5 Grassed Spillway Trickle Tube	LE CRASSED S REFERENCY TO INTERCEPT INP
EXCAVATED POND DESIGN STANDARD s less than 3 feet (measured from top de toe of slope. ray with 10 ft. B. Using spillway with 20 ft. bottom width. th. Example Elevations: 101.5 Top of Fill 101.0 100.6 Grassed Spillway 100.5 100.0 Trickle Tube	LUSE MANUFACTURED (CORE 1 TEDICH 4 FT. HIV.
EXCAVATED POND DESIGN STANDAR itsight of fill is less than 3 feet (measured from top of fill to outside toe of alope. A. Using spillway with 10 ft. B. Using spillway with bottom width. Example Elevations: Example Elevations: Top of Fill Grassed Spillway 100.5 Grassed Spillway 100.0 Trickle Tube	RIGID PVC TRICACE TUBE (WATER LINE) ELEVATION TENTINE TENTINE STRIPPED GROUND LINE

GRASS SPILLWAY DESIGN

Directions: Fill in bottom width, depth, spillway elevation, outlet channel elevation, length, and percent of slope. Elevations should correspond to elevations on PLAN VIEW page.

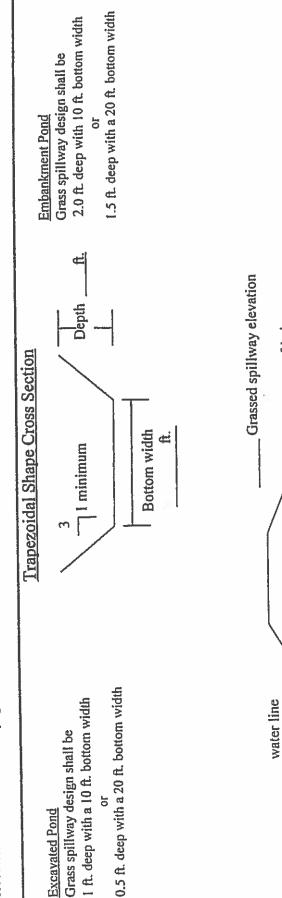

NOTE: All disturbed areas down to 1 foot below the water line or inside slope pond fill and spillway should be seeded and mulched. Seeding recommendations are included. Grass spillway shall be located in erosion resistant soils and grass cover maintained.

outlet elevation

35-50 ft. recommended

20 ft level section

2.5 - 4% recommended

% slope

min. of 2%

NOTE: BY INSPECTING THE PROPOSED SITE AND REVIEWING THE POND CONSTRUCTION PLANS, THE MEDINA COUNTY SWCD SPECIFICATIONS. LANDOWNERS MUST ENSURE THAT CONTRACTOR USES APPROPRIATE CONSTRUCTION METHODS AND DOES NOT CERTIFY THAT THE POND IS BUILT TO NATURAL RESOURCES CONSERVATION SERVICES STANDARDS AND MATERIALS, AND THAT THE POND IS BUILT AS PLANNED.